

OV300 ACCESSORIES

PROOFING CABINET




Sturdy 4" (10.2 cm) swivel casters (2 locking)

Conn. Points

- ▲ Power
- Water
- Drain

Proofing cabinet height: 33.00" (83.8 cm)

TOP VIEW

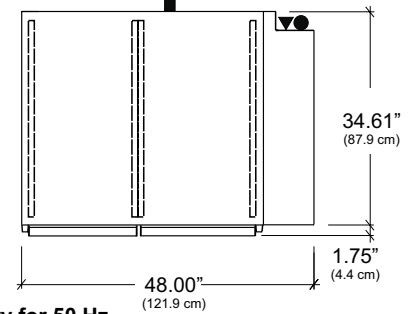

Freight Class: 100 Contact Factory for 50 Hz

MODEL	SHIPPING WGT.	DESCRIPTION
PC800	363 lbs.	Proofing Cabinet, 16 Pan Capacity (18"x26") with 3" slide spacing (45.7 cm x 66.0 cm) (7.6 cm)
POWER: 120V/1/60/16A or 208-240V/1/60/9A WATER: 3/8" (.95 cm) Cold water @ 30-80 psi DRAIN: 1/2" (1.27 cm) Rear drain. Route to air-gap drain.		



MINI-RACK STAND



Shown with sturdy 4" (10.2 cm) swivel casters (2 locking)


Stand depth: 34.61" (87.9 cm)

Freight Class: 150


MODEL	SHIPPING WEIGHT	DESCRIPTION
Stand-12 Pan	138 lbs.	Stand with 4" casters 12 Pan Capacity (18"x26") with 3" slide spacing (45.7 cm x 66.0 cm) (7.6 cm)
Stand-12 PanL	138 lbs.	Stand with 4" legs 12 Pan Capacity (18"x26") with 3" slide spacing (45.7 cm x 66.0 cm) (7.6 cm)
Stand-16 Pan	142 lbs.	Stand with 4" casters 16 Pan Capacity (18"x26") with 3" slide spacing (45.7 cm x 66.0 cm) (7.6 cm)
Stand-16 PanL	142 lbs.	Stand with 4" legs 16 Pan Capacity (18"x26") with 3" slide spacing (45.7 cm x 66.0 cm) (7.6 cm)

FRONT VIEW: 12-Pan Stand


(Allows the OV300 to fit under 6'6" (198 cm) high canopy hood when used with the Standard Trim Package.)

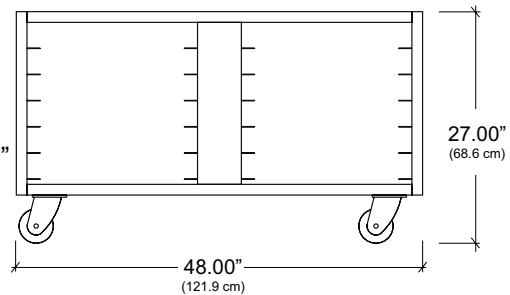


FRONT VIEW: 16-Pan Stand

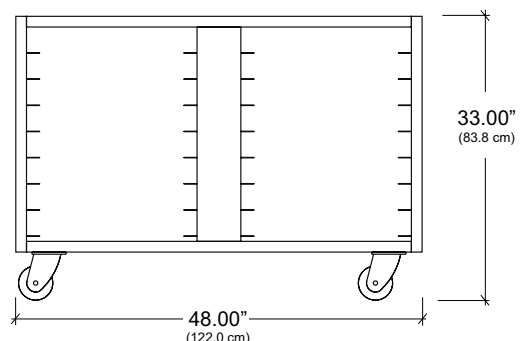


OV300 HEIGHT CHOICES

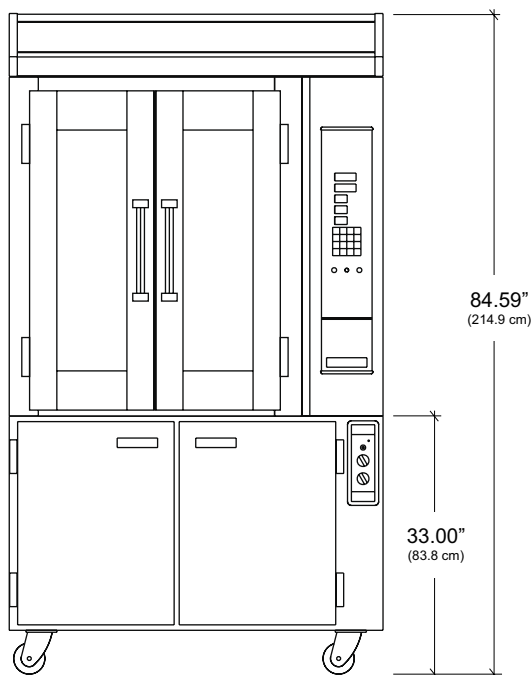


Height reflects OV300 with
Optional Trim
and 16-Pan Proofer
or 16-Pan Stand

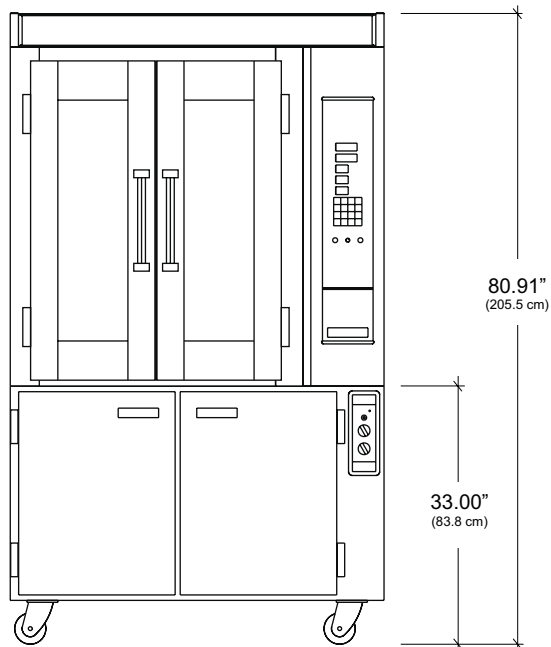

Height reflects OV300 with
Standard Trim
and 16-Pan Proofer
or 16-Pan Stand

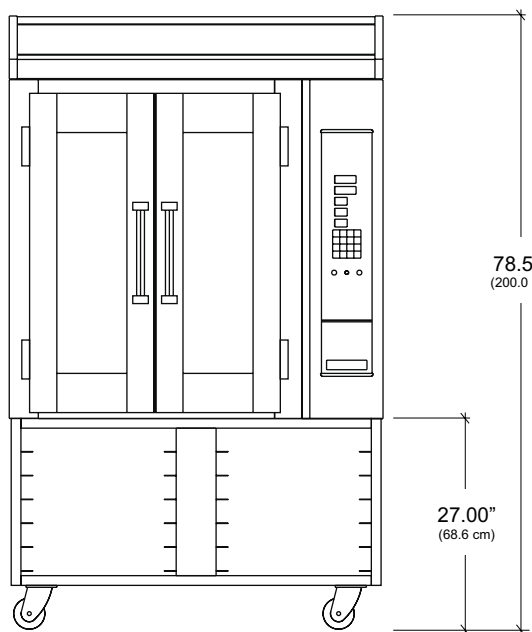

Height reflects OV300 with
Optional Trim
and 12-Pan Stand

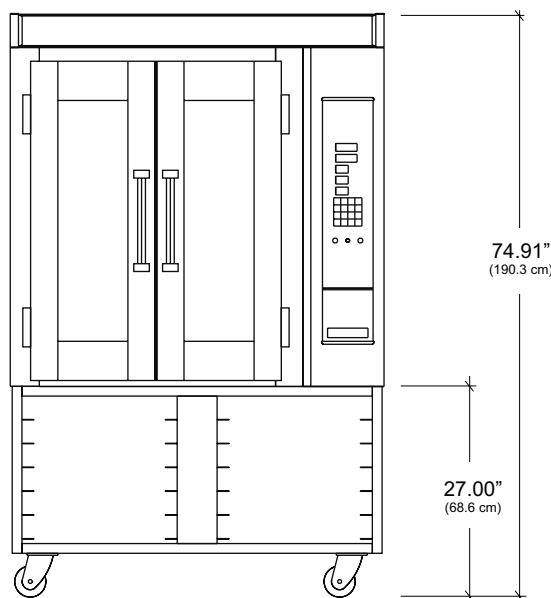

Height reflects OV300 with
Standard Trim
and 12-Pan Stand



BAXTER

OV300 Accessories

PRINTED IN U.S.A. 5/02

BAXTER • 19220 STATE ROUTE 162 EAST • ORTING, WA 98360
(360) 893-5554 • CUST SVC: (800) 777-2828 • FAX: (360) 893-6836 • www.baxtermfg.com