






APPROVAL/STAMP

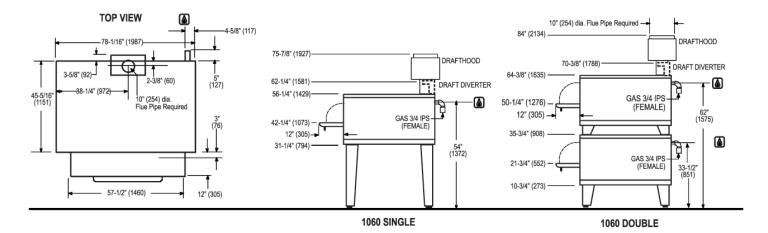

SHORT FORM SPECIFICATIONS

Provide Blodgett (single/double) deck oven, model 1060. Construction shall be stainless steel on front, top, back and sides, and shall be fully insulated on all sides. Oven shall be supported by formed adjustable legs. Door(s) shall be spring assisted with concealed hinges and chrome plated tubular steel handles. Separate burner door provided for ignition, cleaning and adjustment. Each baking compartment shall be 60" W x 10" H x 36" D and shall be lined with aluminized steel. Deck shall ultra rokite. Unit shall be gas heated by two (2) free-floating, easily removable, duplex-type burners controlled by a snap throttle thermostat with range of 300°F to 650°F. Each compartment provided with flue vent. Provide with two year parts and one year labor warranty. Provide with options and accessories as indicated.

DIMENSIONS:SingleDoubleNumber of sections:12Number of controls:12Number of compartments:12

 Size of compartment:
 60" (1524mm) W x 10" (254mm) H x 36" (914mm) D

 Area of each compartment:
 14.6 sq. ft. (1.4m²)
 14.6 sq. ft. (1.4m²)

 Total area of oven:
 29.2 sq. ft. (2.7m²)
 29.2 sq. ft. (2.7m²)

29.2 sq. π. (2.7m²) 29.2 sq. π. (2.7m²)

Clearance below oven: 31-1/4" (794mm) 10-3/4" (273mm)

Floor space: 78-1/4" (1988mm) W x 46-5/16" (1176mm) D

Product clearance: 6" from combustible and non-combustible construction

MAXIMUM INPUT:

 1060B single
 120,000 BTU/hr

 1060B double
 240,000 BTU/hr

GAS SUPPLY:

3/4" IPS connection at rear of oven

Manifold Pressure:

• Natural - 3.5" W.C. min.

• Propane – 10.0" W.C. min.

Inlet Pressure:

• Natural - 7.0" W.C. min. - 10.5" W.C. max.

Propane – 11.0" W.C. min. – 13.0" W.C. max.

MINIMUM ENTRY CLEARANCE:

Uncrated 26" (660mm) Crated 31" (787mm)

SHIPPING INFORMATION:

Approx. Weight:

Single: 1050 lbs. (476kg) Double: 2100 lbs. (952kg)

Crate sizes:

84" (2134mm) x 54" (1372mm) x 31" (787mm)

NOTE: The company reserves the right to make substitutions of components without prior notice

Printed in U.S.A. NOTE: FOR COMMERCIAL USE ONLY P/N 35040 Rev P (9/05)