


SDR-4 DOUGH ROLLER SDR-4FL DOUGH ROLLER

Welded steel construction

Flour pan pivots for ease of cleaning

On/off switch protected from flour with clear rubber boot

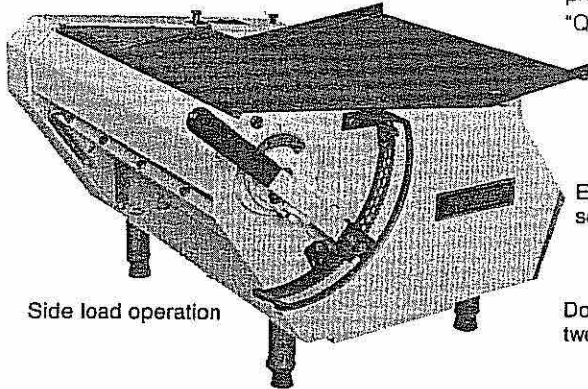

Side load operation

Low profile design

Non-skid sound suppressors supplied

Meets OSHA Requirements

Safety interlocks automatically and immediately shut off machine when any panel is removed or opened for servicing or cleaning


2 large 20" indexed, new precision machined rollers with "Quick-Set" adjustment handle

Easy to remove polyethylene scrapers

Dough stops allow for presetting two-pass operation

Jam-proof design, pusher bar built-in for use in the rare event of sticky dough.



Stainless steel and aluminum dough chute has protective housing surrounding dough loading area for complete safety.

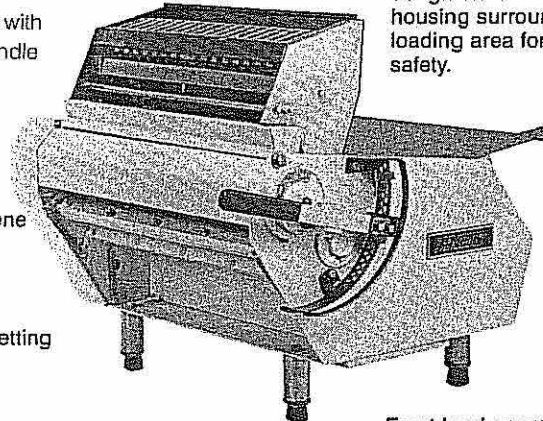

Front load operation

Rugged 1/2 HP motor with speed reducer.

CONSTRUCTION FEATURES AND SPECIFICATIONS

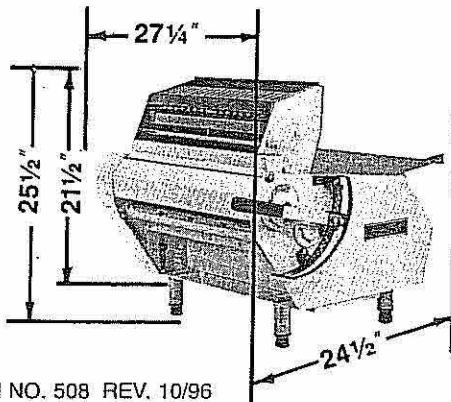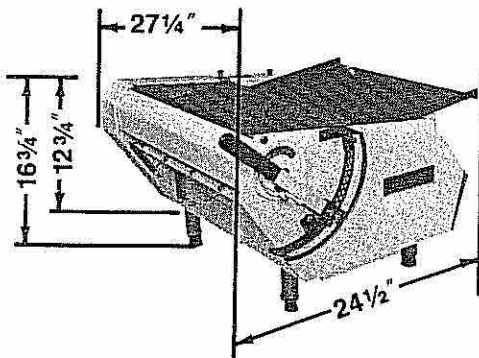

	SDR-4	SDR-4FL
Roller Size:	3 1/2" Dia. x 20" Lg.	3 1/2" Dia. x 20" Lg.
Roller Material:	Synthetic or Metal	Synthetic or Metal
Motor H.P.:	1/2 Standard	1/2 Standard
Finish:	White Powder Coating	White Powder Coating
Dough Chute:	—	Stainless Steel and Aluminum
Infeed Pan and Guard:	Stainless Steel	Stainless Steel and Aluminum
Flour Pan:	Stainless Steel	—
Stop/Start Switch:	Heavy Duty Type	Heavy Duty Type
Ball Bearings:	Sealed	Sealed
Voltage:	115V - 60 HZ Single Phase	115V - 60 HZ Single Phase
Amp:	7	7
Roller Speed:	57 FPM	57 FPM
Legs:	4" Sanitary Adjust.	4" Sanitary Adjust.
6 Foot 3 Wire Cord and Plug	Standard	Standard

Because of our continuous program of product improvement, Anetsberger Brothers, Inc. reserves the right to change models and specifications without notice.