

Model BE-SFC-G

OPTIONS & ACCESSORIES




29" Stand With Casters

6" Adjustable Legs

4" Adjustable Legs (counter-top)

4-1/2" Locking Casters

Natural Gas or Propane Gas

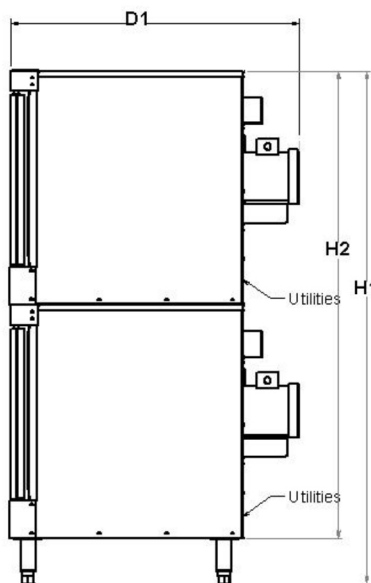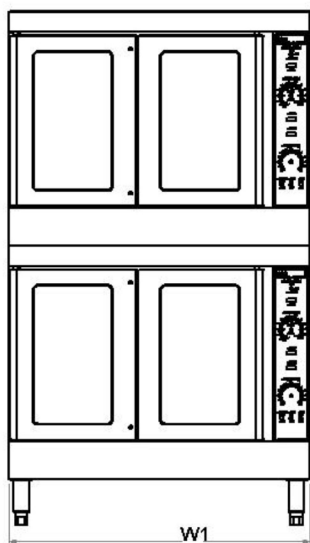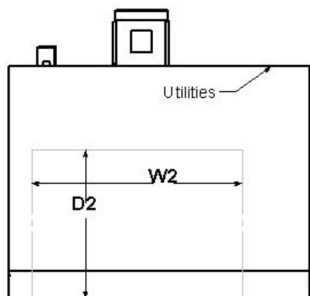

(BE-SFC-G2 Shown)

Clearance from Combustibles 1" Sides and Back, 3" from Top

Model	Height		Width		Depth			Weight		Freight Class
	H1	H2	W1	W2	D1	D2	Door Open	Actual	Ship	
BE-SFC-G1 w/29" stand	61.5 [1562]	32.4 [823]	43.7 [1111]	29 [737]	41.0 [1041]	21.0 [533]	55.7 [1415]	575 [260]	675 [306]	85
BE-SFC-G2 w/6" legs	70.8 [1798]	64.8 [1645]	43.7 [1111]	29 [737]	41.0 [1041]	21.0 [533]	55.7 [1415]	1150 [521]	1225 [555]	85

Utility Requirements

Model	VAC	PH	Kw	Max Breaker	Min. Circuit	BTU/Hr	Manifold Pressure	Supply Pressure	Notes
BE-SFC-G1 Natural Gas	120	1	0.75	15	15	50,200	3.5" wc	6" wc	Note: Supply Pressure must never exceed 14" Water Column or 1/2 PSI. Gas Supply connection is 1/2" NPTM. Gas supply must provide the minimum supply pressure required with the oven operating.
BE-SFC-G1 Propane Gas	120	1	0.75	15	15	40,200	11" wc	12" wc	
BE-SFC-G2 Natural Gas	(2) 120	1	(2) 0.75	(2) 15	(2) 15	(2) 50,200	3.5" wc	6" wc	
BE-SFC-G2 Propane Gas	(2) 120	1	(2) 0.75	(2) 15	(2) 15	(2) 40,200	11" wc	12" wc	