
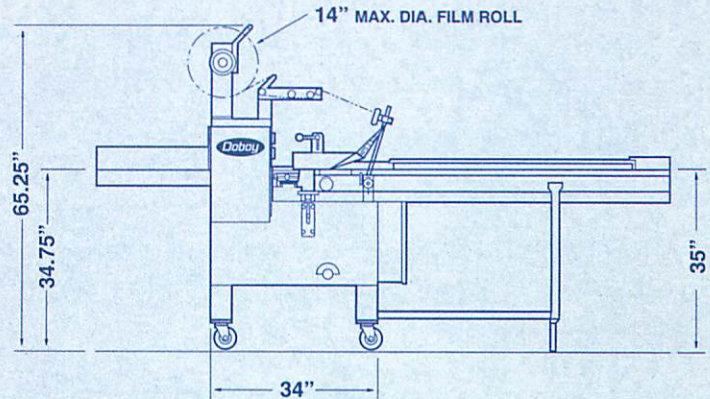


# SCOTTY II™

## Horizontal Wrapper

## Continuous Wrapping, Up To Sixty Packages Per Minute.

The Scotty II continuously creates longitudinal fin seals and extended-end crimp seals. Variable speed is one of several adjustable controls that will benefit your production line.

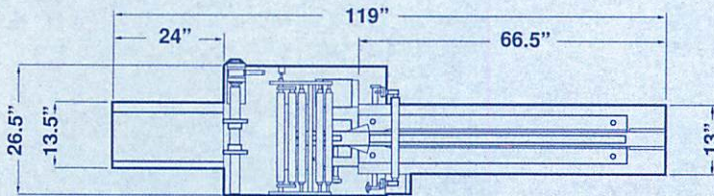

### Rigid Parent Roll Backstand

Utilizes tensioning arm and self compensating drag brake system. Electric eye can be mounted for registered films.

### Pause Control

Adjusts length of sealing dwell time, enabling rotary cutting heads to match both film characteristics and machine speed.

### Control Panel

Main power and start buttons, heat controls, and optional electric eye controls are all conveniently located.

### Precise Heat Controls

Temperature controls with digital indicators provide consistent sealing regardless of speed or voltage fluctuations.

### Rotary Cutting Head

Knife-and-anvil style rotary-action cutoff seals and separates individual packages from film tube.

### Fin Seal Wheels

Assures positive longitudinal seal. Feeding and tracking controlled from single point, without pressure on the package. Bottom seal for clear view of product, clean package graphics.

### Adjustable Package Length

Handwheels adjust length from 4 - 12" or 5 - 15".

### Variable Speed

Handwheel for speed adjustment from 20 to 60 packages/min.

### Package Former

Guides film completely. Made of stainless steel and aluminum. Custom designed for quick product change-over.

### Five-Foot Stainless Steel Infeed

Ideal for hand-feeding applications. All parts in contact with product are stainless steel.



# SCOTTY II™

## Horizontal Wrapper

MACHINE SPECIFICATIONS	
Length	119.00" (3022.6 mm)
Width	26.50" (673.1 mm)
Height	65.25" (1657.35 mm)
Weight	800 lbs. (362.87 kg)
Speed	20 - 60 products/min.
Electrical	220/60/1. NEMA 1
Construction	Steel frame. Stainless steel in product contact areas.

PRODUCT SPECIFICATIONS	
Products outside these limits may be packaged with machine modifications.	
Package Height	Max. 2-3/4" (69.85 mm) with standard crimper. Max. 3-3/4" (95.25 mm) with large crimpers.
Package Width	1/2" - 7" (12.7 mm - 177.80 mm)
Package Length	Specify either 4" - 12" (101.6 mm - 304.8 mm) or 5" - 15" (127 mm - 381 mm)
Web Width	Up to 20" (508 mm)

## Parts and Service Dependability

Over 30,000 different Doboy parts are kept in stock at all times. That means every Doboy machine is never more than a phone call away from genuine quality Doboy replacement parts. A computerized inventory control system assures immediate response, while professional Doboy service technicians provide nationwide service, including installations, training, maintenance, and in-plant repairs. For more information, or the name of the nearest Doboy representative, call or write today.



Doboy Packaging Machinery Inc., New Richmond, WI 54017  
715-246-6511, Fax 715-246-6539

PMMI USA®  
Packaging Technology Group