


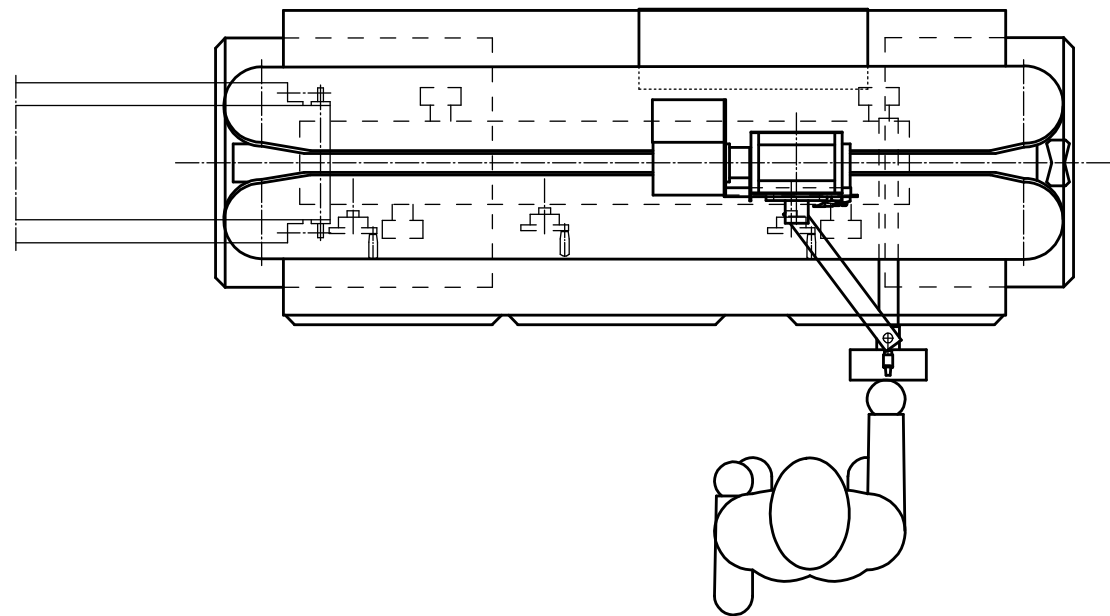
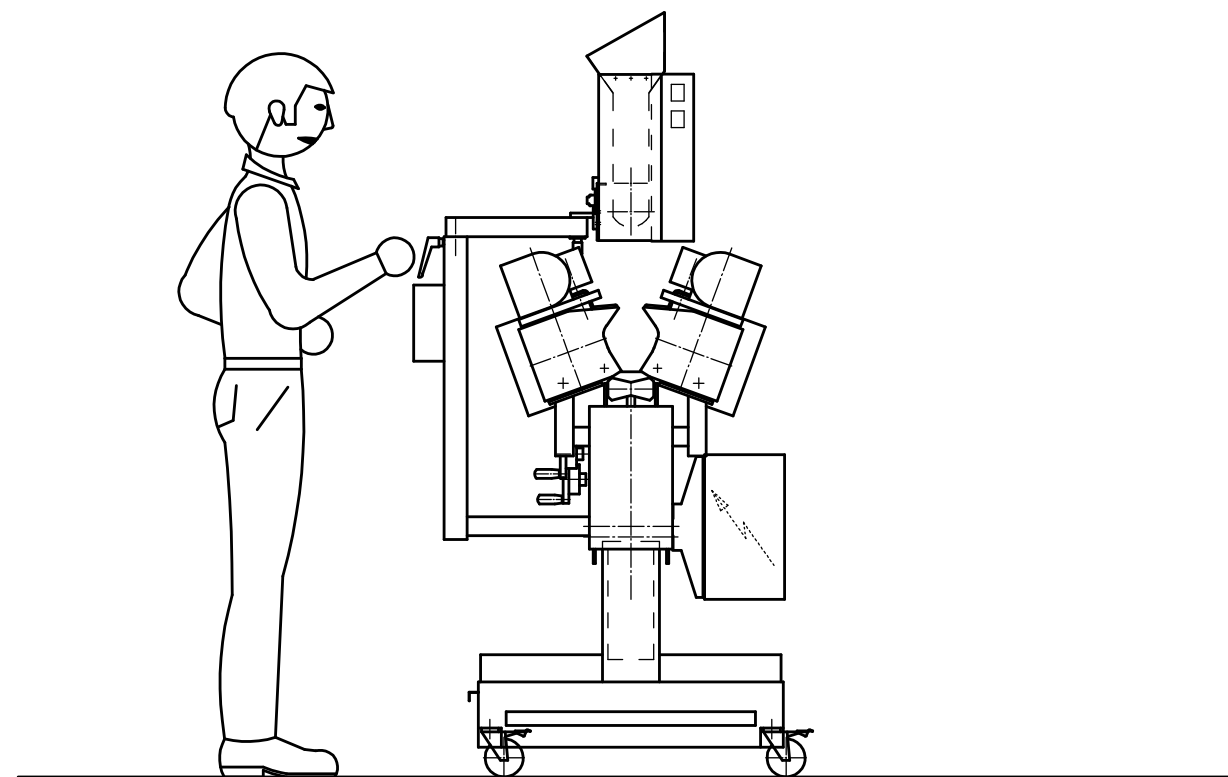


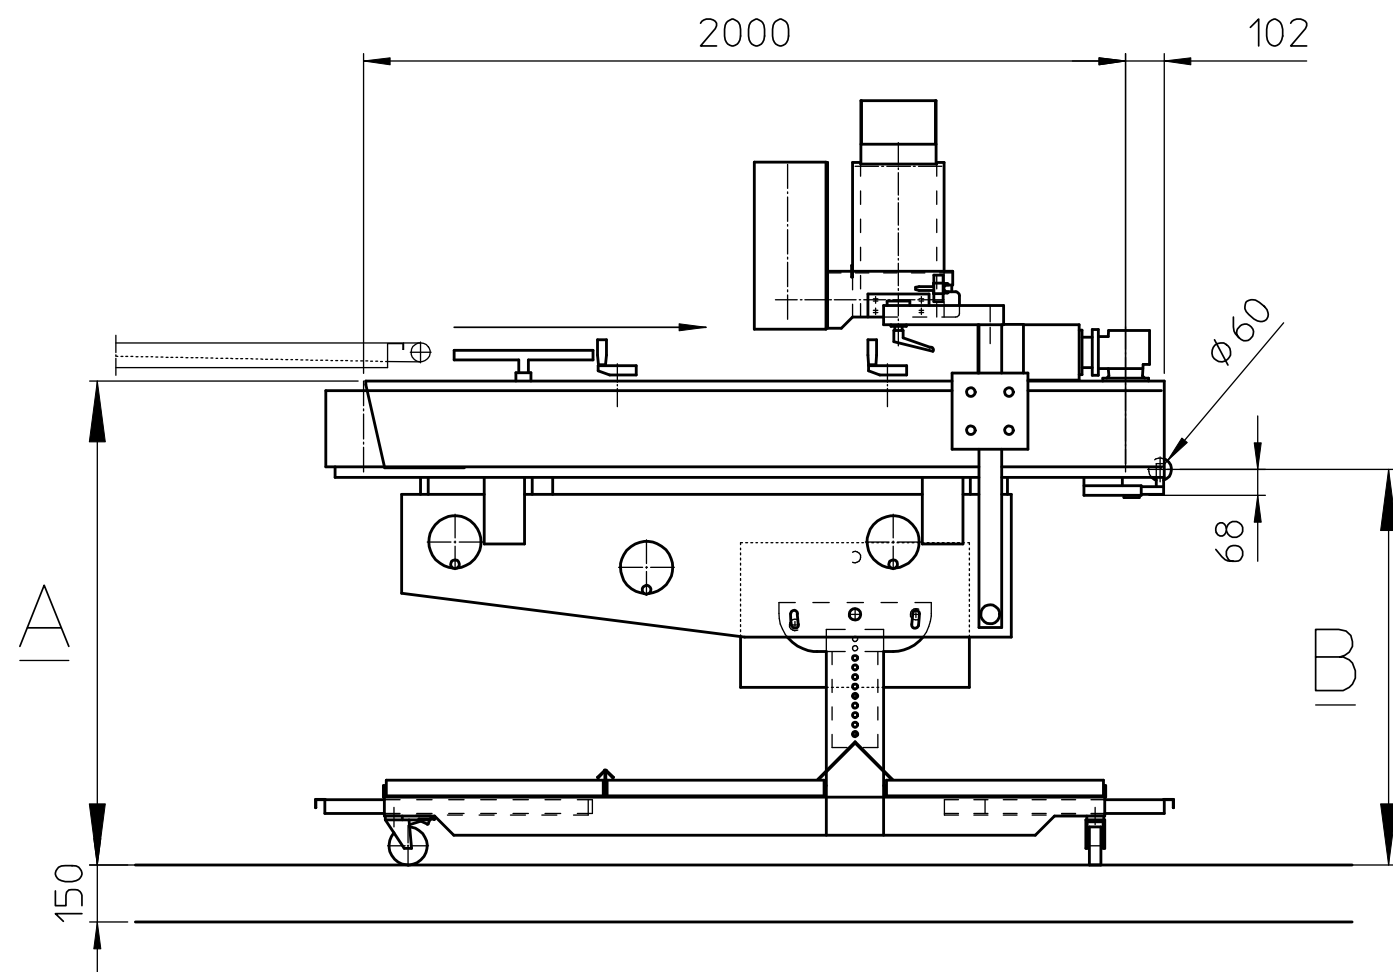

⚡ 3N ~ 400V - 50Hz + $\oplus$
⚡ P = ± 2kW

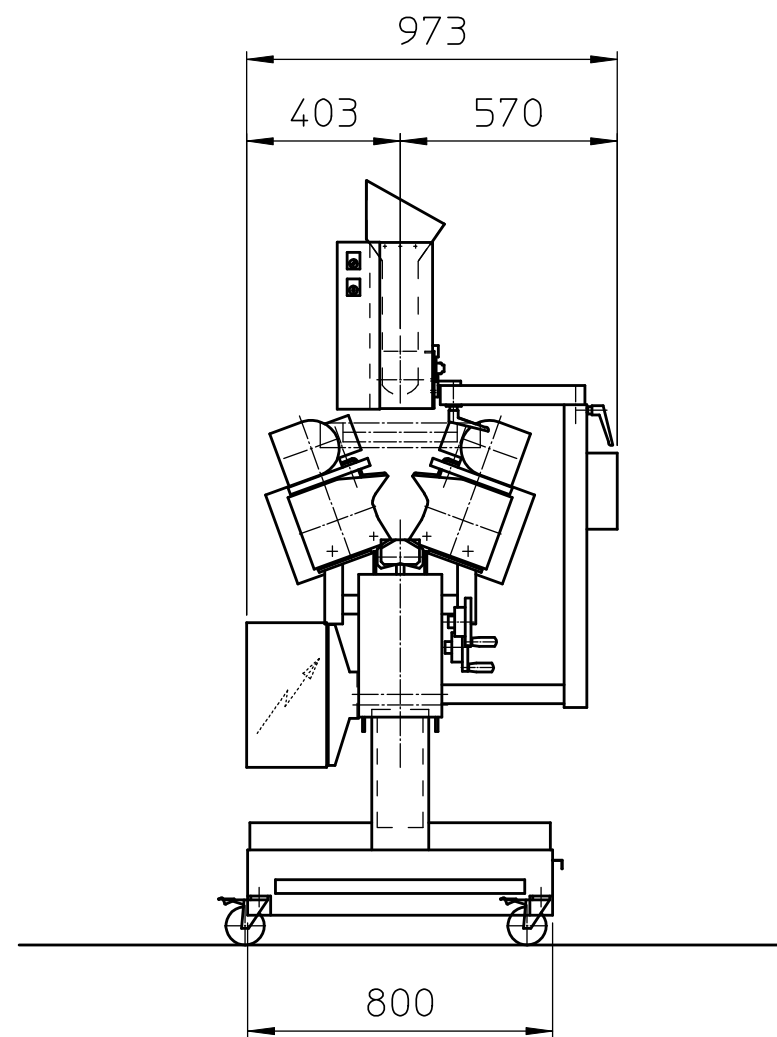

Adjustable in height max 150mm in steps of 25mm

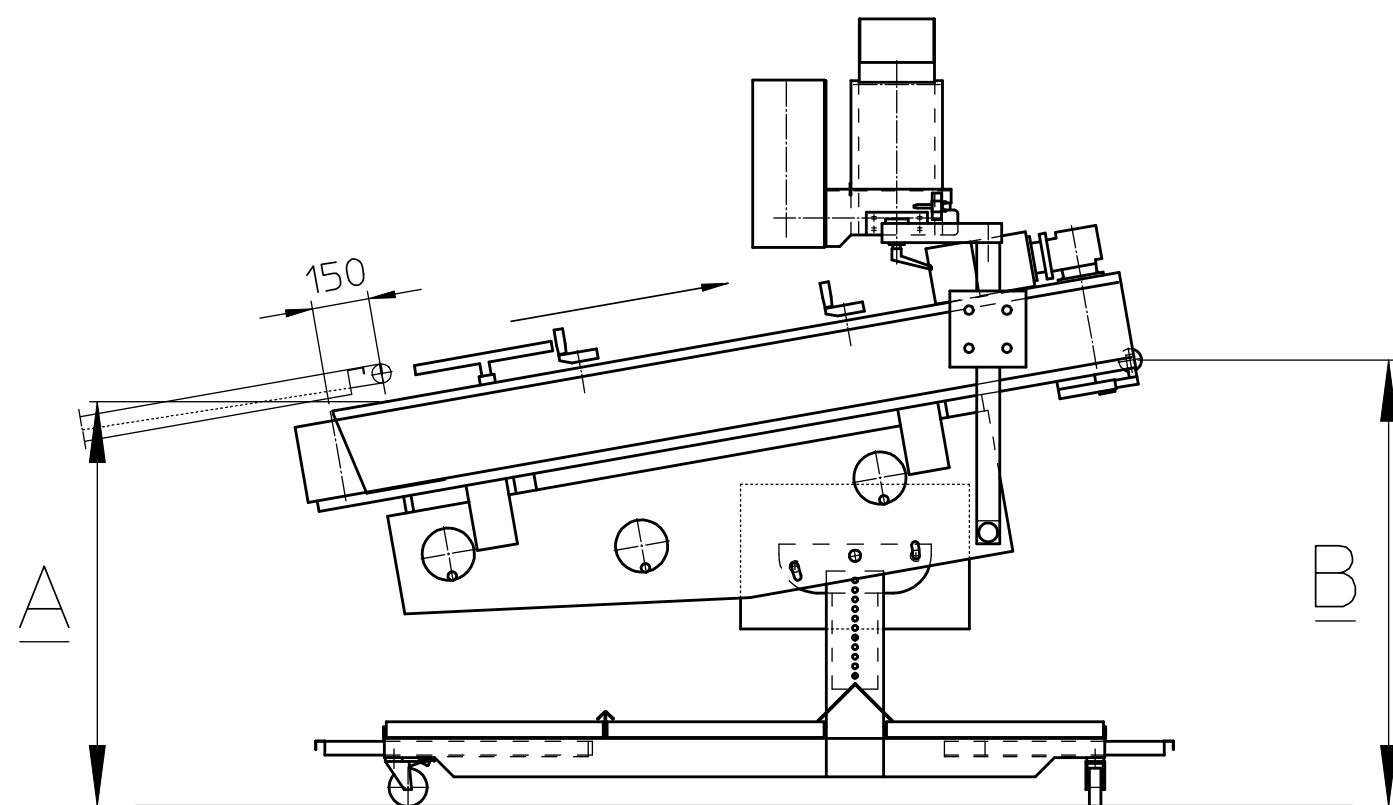

Adjustable angle 0° - 10°

Angle	Frame version L		Frame version H	
	A =	B =	A =	B =
10°	860	960	1070	1170
9°	880	940	1090	1150
8°	900	930	1110	1140
7°	920	920	1130	1130
6°	940	910	1150	1120
5°	960	890	1170	1100
4°	980	880	1190	1090
3°	1000	860	1210	1070
2°	1020	950	1230	1060
1°	1040	840	1250	1050
0°	1060	820	1270	1030

FOR APPROVAL BENIER NEDERLAND B.V.		FOR APPROVAL CUSTOMER	
SIGNATURE:	DATE:	DATE:	DATE:

DIMENSIONS IN MM		DERIVATED FROM:	REFERENCE:
AM. PROJ.			

 This portfolio, and all data contained therein, are exclusive property of BENIER NEDERLAND B.V., issued in strict confidence and not be reproduced, copied or used for any purpose whatsoever without written permission of BENIER NEDERLAND B.V.	DRAWN BY: F. Lee	DATE: 2006-07-05	DESCRIPTION: VB0200-HDS	
	CHECKED BY:	DATE:	CODE: 99305036	REV.: 00
SCALE: 1:20	A2			

