



Peerless® ROLLER BAR MIXER


Heavy Duty

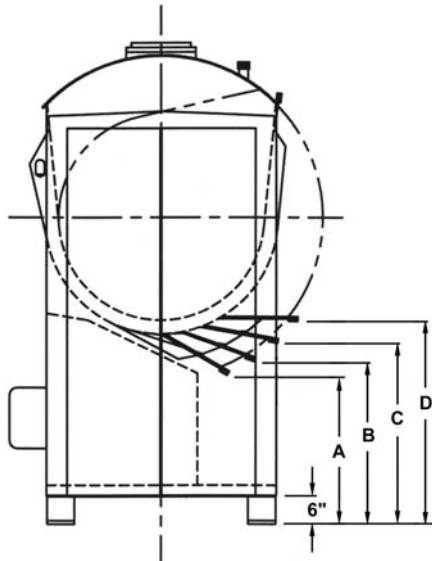

**Tilt Height with
Standard 2" Lip**

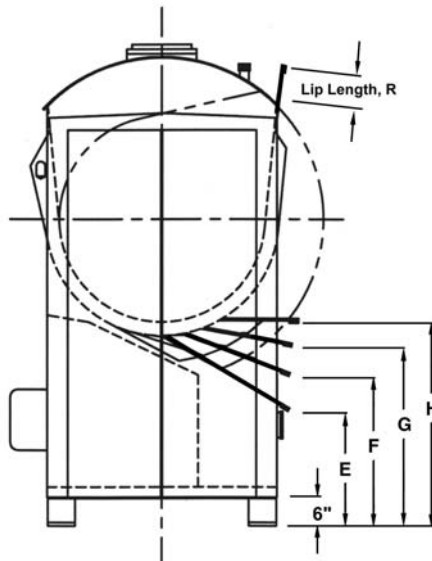

Tilt Height with Extended Lip

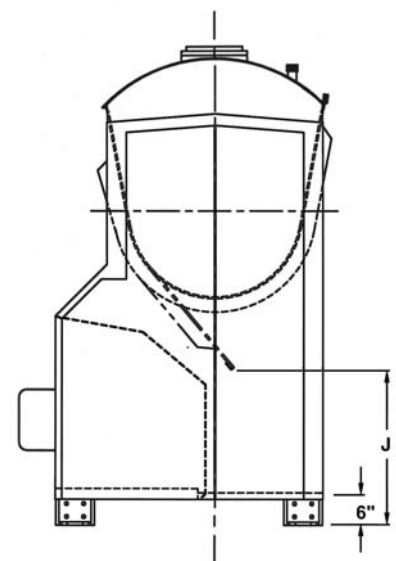

**Overtilt Option
140°**

(INCHES)



TILT ANGLE	120°			110°			100°			90°			OVERTILT OPTION 140°	
DIMENSION	A	R	E	B	R	F	C	R	G	D	R	H	J	R
HS4	28 3/8	7	25 1/4	32	2	32	36	2	36 1/4	40 1/2	2	40 1/2	24	2
HS6	27 1/4	10	22 1/2	30 1/2	4	29 1/4	34	2	34 1/2	38 1/4	2	38 1/4	23 3/4	2
HS8	26	12	20	29	6	27	32 1/4	2	32 1/4	36 1/4	2	36 1/4	23 1/4	2
HS10	29	13	22 1/2	32 1/4	7	30	36 1/4	2	36 1/4	41	2	41	25 1/4	2
HS13	28	15	20 1/4	31	9	27 3/4	34 1/2	4	34 1/4	39	2	39	25	2
HS16	33 3/4	15	26	37	9	34	41	3	41	46	2	46	30 1/4	2
HS20	32 3/4	18	23 1/4	35 3/4	11	31 3/4	39 1/2	5	38 3/4	44	2	44	30	2
HS24	32 3/4	20	22	35 3/4	13	31	39 1/2	7	38 1/4	44	3	44	30	2
HS28	30 1/4	17	21 1/4	33 1/2	9	30 1/4	37 3/4	5	37	42 1/2	2	42 1/2	27 1/2	2

Due to the continuous effort of Peerless Engineering to improve performance, dimensional data and specifications are subject to change without notice.

Dimensions are for reference only. Please refer to the Certified Data Drawing for final specifications.





Peerless® ROLLER BAR MIXER Heavy Duty

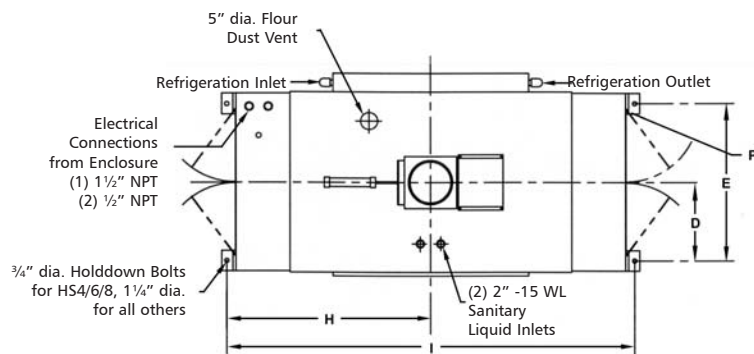


NEMA 12 Remote Mounted Starter Enclosure

NOTE:
Starter enclosure dimensions subject to motor horsepower and voltage.

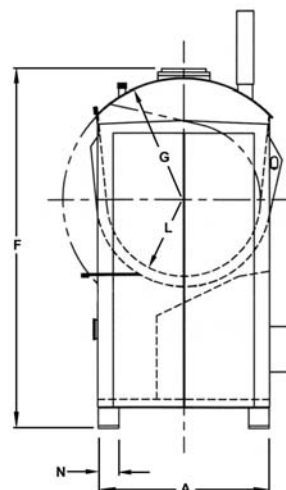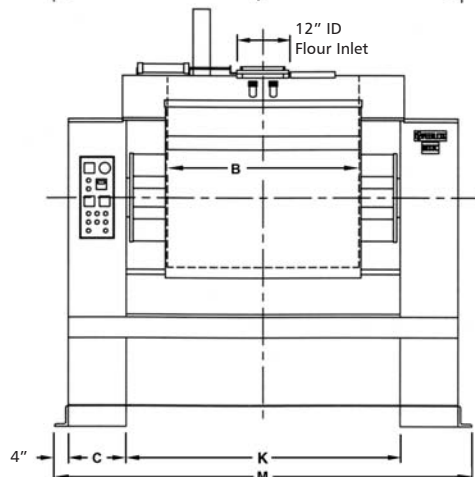

NOTE:
Dimension "J" is required behind Mixer to easily remove Motor and Reducer. On most models, Motor and Reducer can be removed through end of the Mixer also.

Legs for HS4/HS6/HS8



DIMENSIONS (Inches)

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P
HS4	40	32	12 1/2	17	34	88 1/2	30	41 3/4	83 1/2	26	56	14	86	6	15 1/2
HS6	40	32	12 1/2	17	34	88 1/2	30	41 3/4	83 1/2	26	56	16	86	6	15 1/2
HS8	40	36	12 1/2	17	34	88 1/2	30	43 3/4	87 1/2	26	60	18	90	6	15 1/2
HS10	46	45	17	20	40	96 3/4	33	54	108	28	69	18	111	6	18 1/2
HS13	46	50	17	20	40	96 3/4	33	56 1/2	113	28	74	20	116	6	18 1/2
HS16	50	56	17	22	44	105 3/4	35	59 1/2	119	32	80	20	122	6	20 1/2
HS20	50	56	17	22	44	105 3/4	35	59 1/2	119	32	80	22	122	6	20 1/2
HS24	54	67	17	22 1/2	45	105 3/4	35	65	130	32	91	22	133	9	22 1/2
HS28	54	67	17	22 1/2	45	108 3/4	38	65	130	32	91	23	133	9	22 1/2
HS 32	54	67	19	22 1/2	45	108 3/4	38	67	134	32	91	24	137	9	22 1/2

SPECIFICATIONS

MODEL	Mixing Capacity (Pounds)	Working Capacity (Cu. Ft.)	Drive Motor (H.P.)	Total Load (KVA)	Tilt Motor (H.P.)	Approx. Floor Load (Lbs./Sq. Ft.)	Net Weight (Pounds)	Approx. Shipping Weight (Pounds)
HS4	400	12.9	30/15	35	5	4,950	9,900	10,400
HS6	600	17.2	40/20	45	5	5,280	10,400	10,900
HS8	800	24.0	50/25	55	5	5,660	11,000	11,500
HS10	1,000	30.2	60/30	65	5	4,770	12,500	13,000
HS13	1,300	41.3	75/37.5	80	5	5,760	15,000	15,700
HS16	1,600	47.6	100/50	105	5	6,750	17,500	18,200
HS20	2,000	56.3	125/62.5	130	5	7,410	19,000	19,700
HS24	2,400	69.5	150/75	155	5	5,620	21,500	22,200
HS28	2,800	74.2	175/87.5	180	5	6,200	23,500	24,400
HS32	3,200	79.9	200/100	205	5	6,680	25,200	26,000

AGITATOR SPEEDS

Standard Two Speed Models

Low - 35 RPM

High - 70 RPM

Single Speed and variable speed versions are available as options

Dimensions are for reference only. Please refer to the Certified Data Drawing for final specifications.



500 S. Vandemark Road
Sidney, OH 45365-0769 • USA
Tel: 937.492.4158 • 800.999.3327
Fax: 937.492.3688
www.thepeerlessgroup.us