





Figure nr. 3

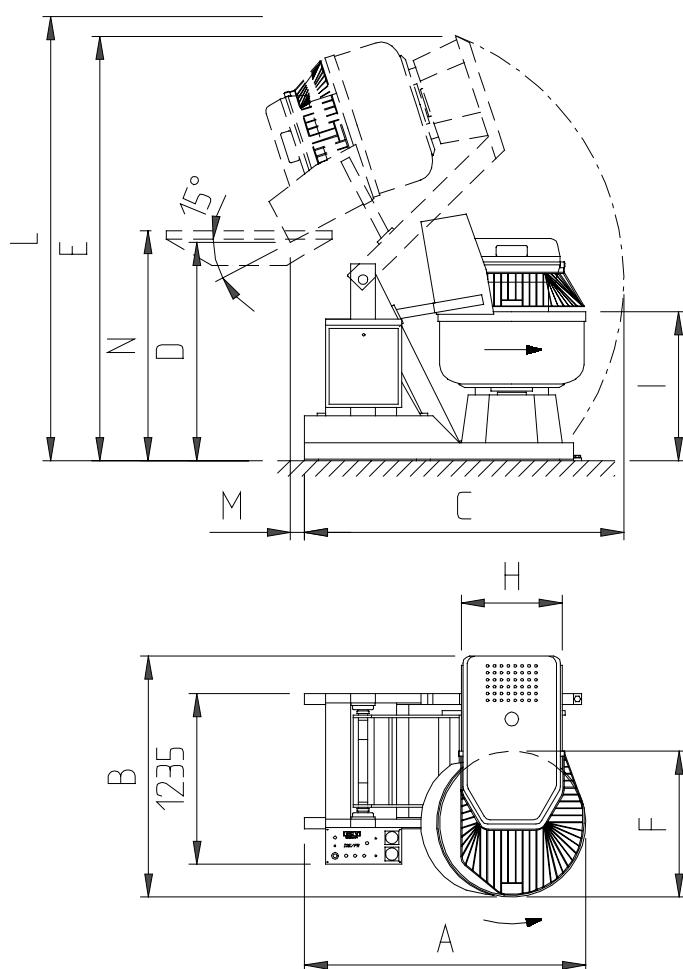

ABBINAMENTI
TYPES OF COUPLING

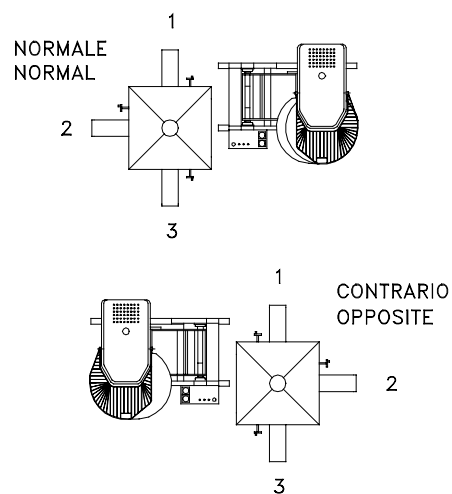

Spiral arm rotating direction (seen from above): counter-clockwise.

Tables

DIMENSIONI (MM)	ISE/160 FRB	ISE/160 FRA	ISE/200 FRB	ISE/200 FRA
A	1700	1835	1700	1835
B	1440	1440	1440	1440
C	2000	2150	2000	2150
D	1270	1720	1250	1700
E	2670	2980	2670	2980
F	900	900	900	900
H	650	650	650	650

TECHNICAL FEATURES		ISE/160 FRA ISE/160 FRB	ISE/200 FRA ISE/200 FRB
Maximum dough capacity	kg	160	200
Maximum flour capacity	kg	100	125
Total capacity	litres	248	293
Approx spiral arm speed (1st-2 nd)	r.p.m.	120/240	120/240
Approx bowl speed (1st-2 nd)	r.p.m.	12/24	12/24
Maximum installed power	kW	9,6	9,6
Maximum absorbed power	kW	8,5	8,5