

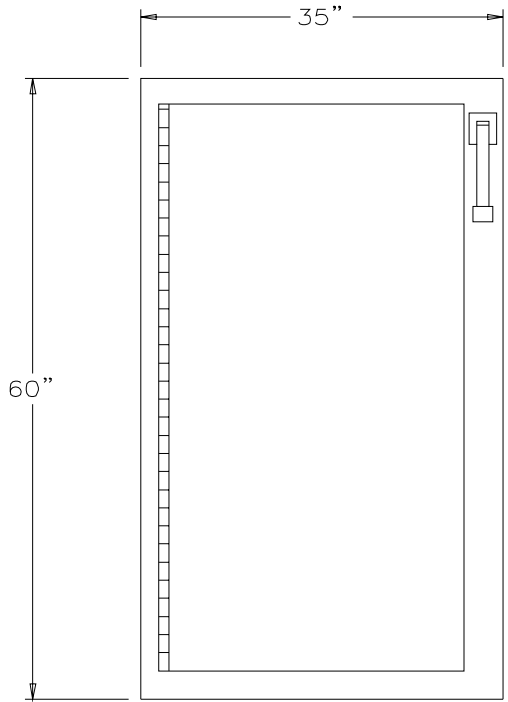


DATE	REV	REVISION (+ ADD. - REMOVE, ± WAS)	DR BY	CK BY
4/13/93	A	WAS 18"	DT	DT

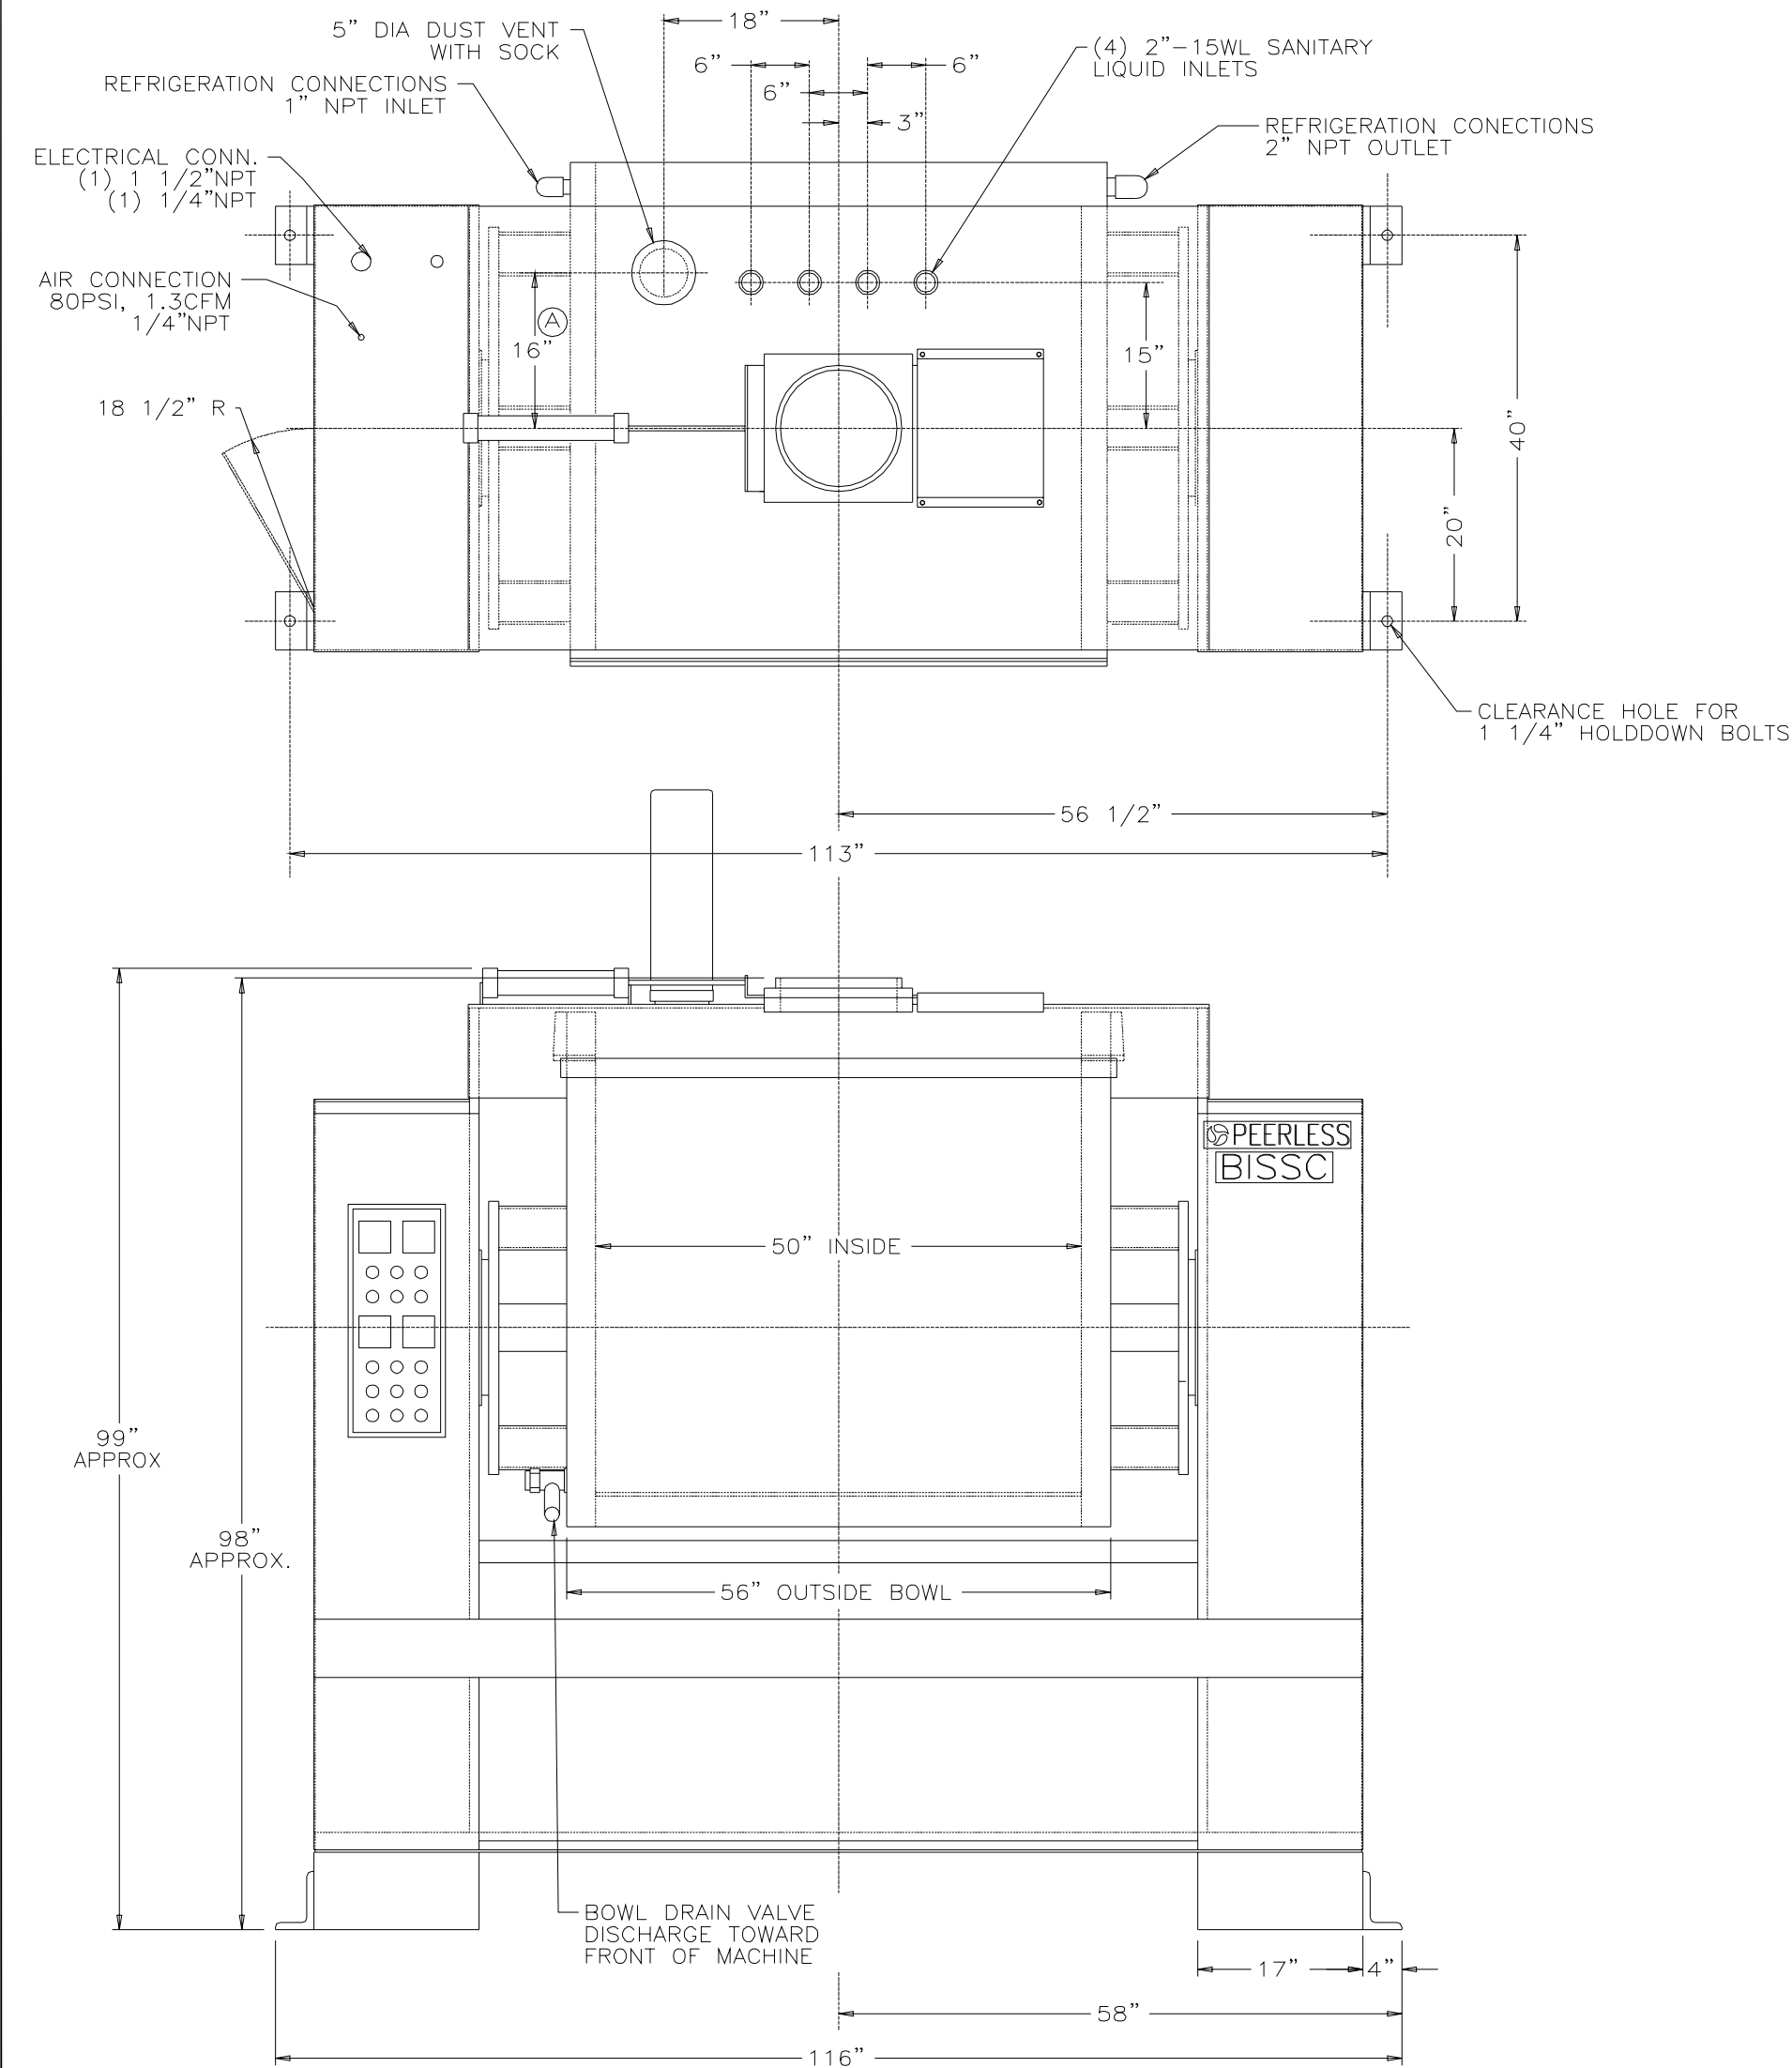

REMOTE MOUNTED NEMA 12
ELECTRICAL ENCLOSURES
12" DEEP

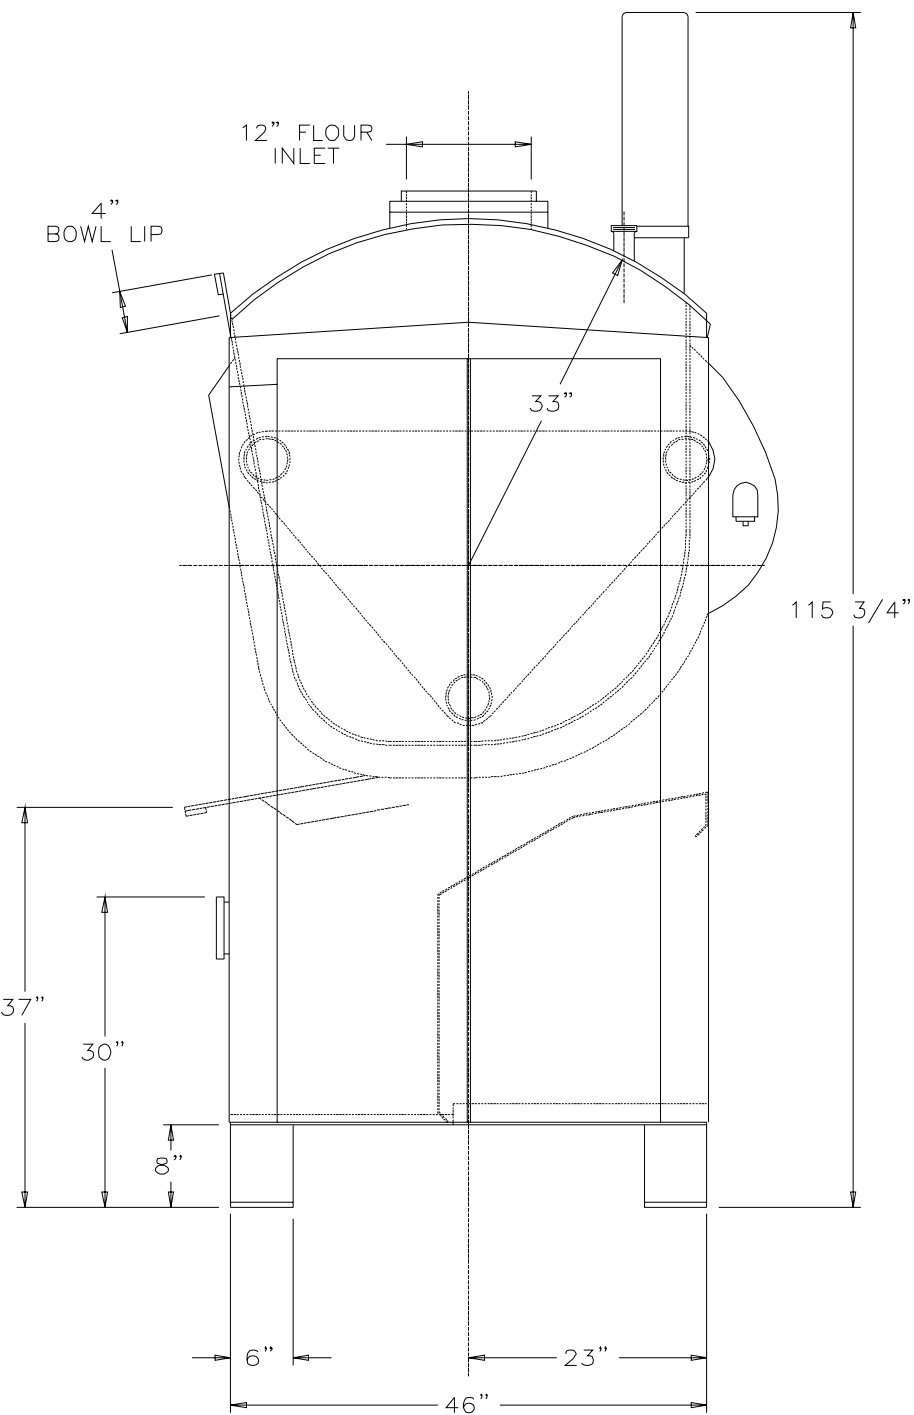

MIXER FEATURES:

60/30 HP, 1800/900 RPM TEFC SANITARY DRIVE MOTOR.
230V 3 PHASE, 60 HERTZ WITH FULL 115 VOLT MAGNETIC CONTROLS.
NEMA 12 STAINLESS STEEL ELECTRICAL ENCLOSURE WITH CIRCUIT BREAKER AND PROGRAMMABLE LOGIC CONTROLLER (AB SLC-500).
SOLID STAINLESS STEEL "D" SHAPED BOWL ASSEMBLY.
SOLID STAINLESS STEEL AGITATOR AND SHAFT.
SOLID STAINLESS STEEL CANOPY.
SOLID STAINLESS STEEL EXTERIOR.
SOLID STAINLESS STEEL WELDED DRIP PAN UNDER BOWL.
SOLID STAINLESS STEEL DIRECT EXPANSION JACKET - R-22 TYPE REFRIGERATION.
SANITARY REMOVABLE PACKING SYSTEM.
AGITATOR SPEED: 35 RPM LOW 70 RPM HIGH.
FLOUR DUST VENT WITH SOCK.
MECHANICAL TIMERS.
ELECTRONIC DIGITAL DOUGH THERMOMETER.
SINGLE END DRIVE - GATES POLY CHAIN BELT DRIVE.
HYDRAULIC POWERED BOWL TILT - 100'.
BOWL DRAIN VALVE.
STAINLESS STEEL CLAD LEGS.

NOTE:
APPROX. 28" IS REQUIRED
BEHIND MIXER TO REMOVE
MOTOR OR REDUCER

(2) PEERLESS MODEL HS13 HIGH SPEED MIXERS
FOR IDEAL BAKING - BATEVILLE, ARKANSAS
F.O. No. 93008/93009

 PEERLESS MACHINERY CORPORATION SIDNEY, OHIO			
TOLERANCES (UNLESS OTHERWISE SPECIFIED) DECIMAL .XX=±.01 ANGLES ±1° FRACTIONAL ±1/32 MATERIAL .XXX=±.005 BREAK ALL EDGES			
SCALE		TITLE	
1:12		CERTIFIED DATA SHEET	
DATE	DRAWING NUMBER	FILE NUMBER	
3/31/93	CDS-573	D19-22	