

All In One Oven/Proofer 5 Pans Capacity Touch Screen Programmable Control

| NO-NO | D . |
|-------------|-----|
| Wind Baking | |
| | |

| Project | | |
|----------|------|--|
| Item No. | | |
| Quantity | | |

ELECTRIC

| \square 1 PH - 208V - 50 A - 10.4 kW - 60 Hz - 2 wires + Ground - NEMA 6-50P |
|--|
| \square 1 PH - 240V - 50 A - 10.4 kW - 60 Hz - 2 wires + Ground - NEMA 6-50P |
| \square 3 PH - 208V - 30 A - 10.4 kW - 60 Hz - 3 wires + Ground - NEMA 15-30 \square |
| \square 3 PH - 240V - 30 A - 10.4 kW - 60 Hz - 3 wires + Ground - NEMA 15-30 μ |
| Other voltages available. Please contact factory for more information. |

STANDARD FEATURES

- Sleek new look
- Cool-to-touch door for added safety
- Easy to use programmable controls
- Wi-Fi Capability
- Patented technology

STANDARD PRODUCT WARRANTY

2 year parts 1 year labor limited warranty

OPTIONS AND ACCESSORIES

☐ Stand

PAN CAPACITY GUIDE

| Pan Type | Capacity | | | | |
|----------------------|----------|--|--|--|--|
| 18" x 26" Full-Sheet | 5 | | | | |
| 13" x 18" Half size | 10 | | | | |

DESCRIPTION

The all new NU-VU X5 has exclusive patented technology that allows you to proof, bake and steam in the same cavity. Save time and labor by not needing to continually return to the unit and move product from the proofer cavity to the oven cavity.


An added steam function allows you to do all types of products including artisan style breads.

The X5 has advanced touch screen controls that allows multi languages along with Wi-Fi capabilities to track your usage.


The sleek new look and cool-to-the touch door allows you to use the unit in front of the customers to visually upsell your fresh product and increase sales.





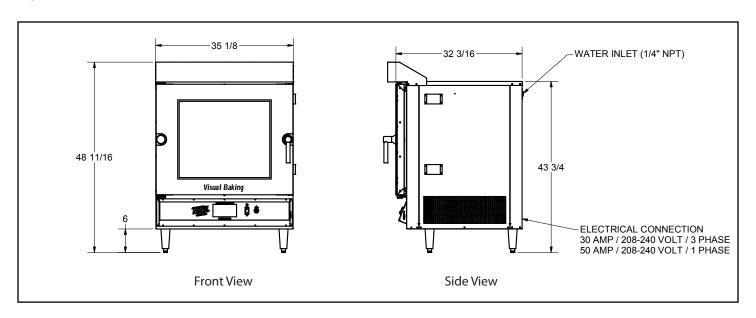

X5 with stand

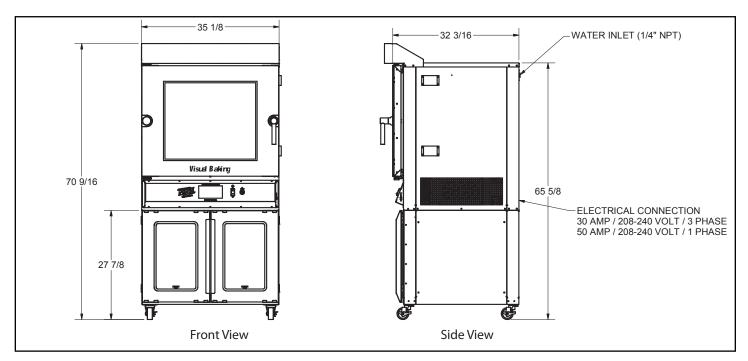

SPECIFICATIONS

| Ī | Model | Overall Dimensions | | | Interior Dimensions | | | Shelf | Clearance | | | Water | Shipping | Freight |
|---|-------|--------------------|-------------------|----------------------|---------------------|--------------|------------------|---------|-------------|-------------|-------------|-------|----------------|---------|
| | wodei | W | D | Н | W | D | Н | spacing | Side | Тор | Bottom | Inlet | Weight | Class |
| | Х5 | 35 1/8" (892) | 32 3/16" (818) | 48 11/16" (1 237) | 28" (711) | 20" (508) | 23 1/4" (591) | 4 1/2" | 4" (102) | 4" (102) | 4" (102) | 1/4″ | 1 135 (515) | 85 |

Due to continuous improvements, specifications and designs are subject to change without notice.