






WELD NO.	WELD SYMBOL	NOTES
W1	 3/8" GMAW MILD STEEL	MULTIPLE PASS
W2	 1/2" GMAW MILD STEEL	MULTIPLE PASS
W3	 1/4" GMAW MILD STEEL	
W4	 GMAW MILD STEEL	

DATE	REV	REVISION (+ ADD, - REMOVE, ± WAS)	SCR NO	DR BY	OK BY
7/31/00	A	UPDATED DIM FOR ASSY	7616	TL	RJ

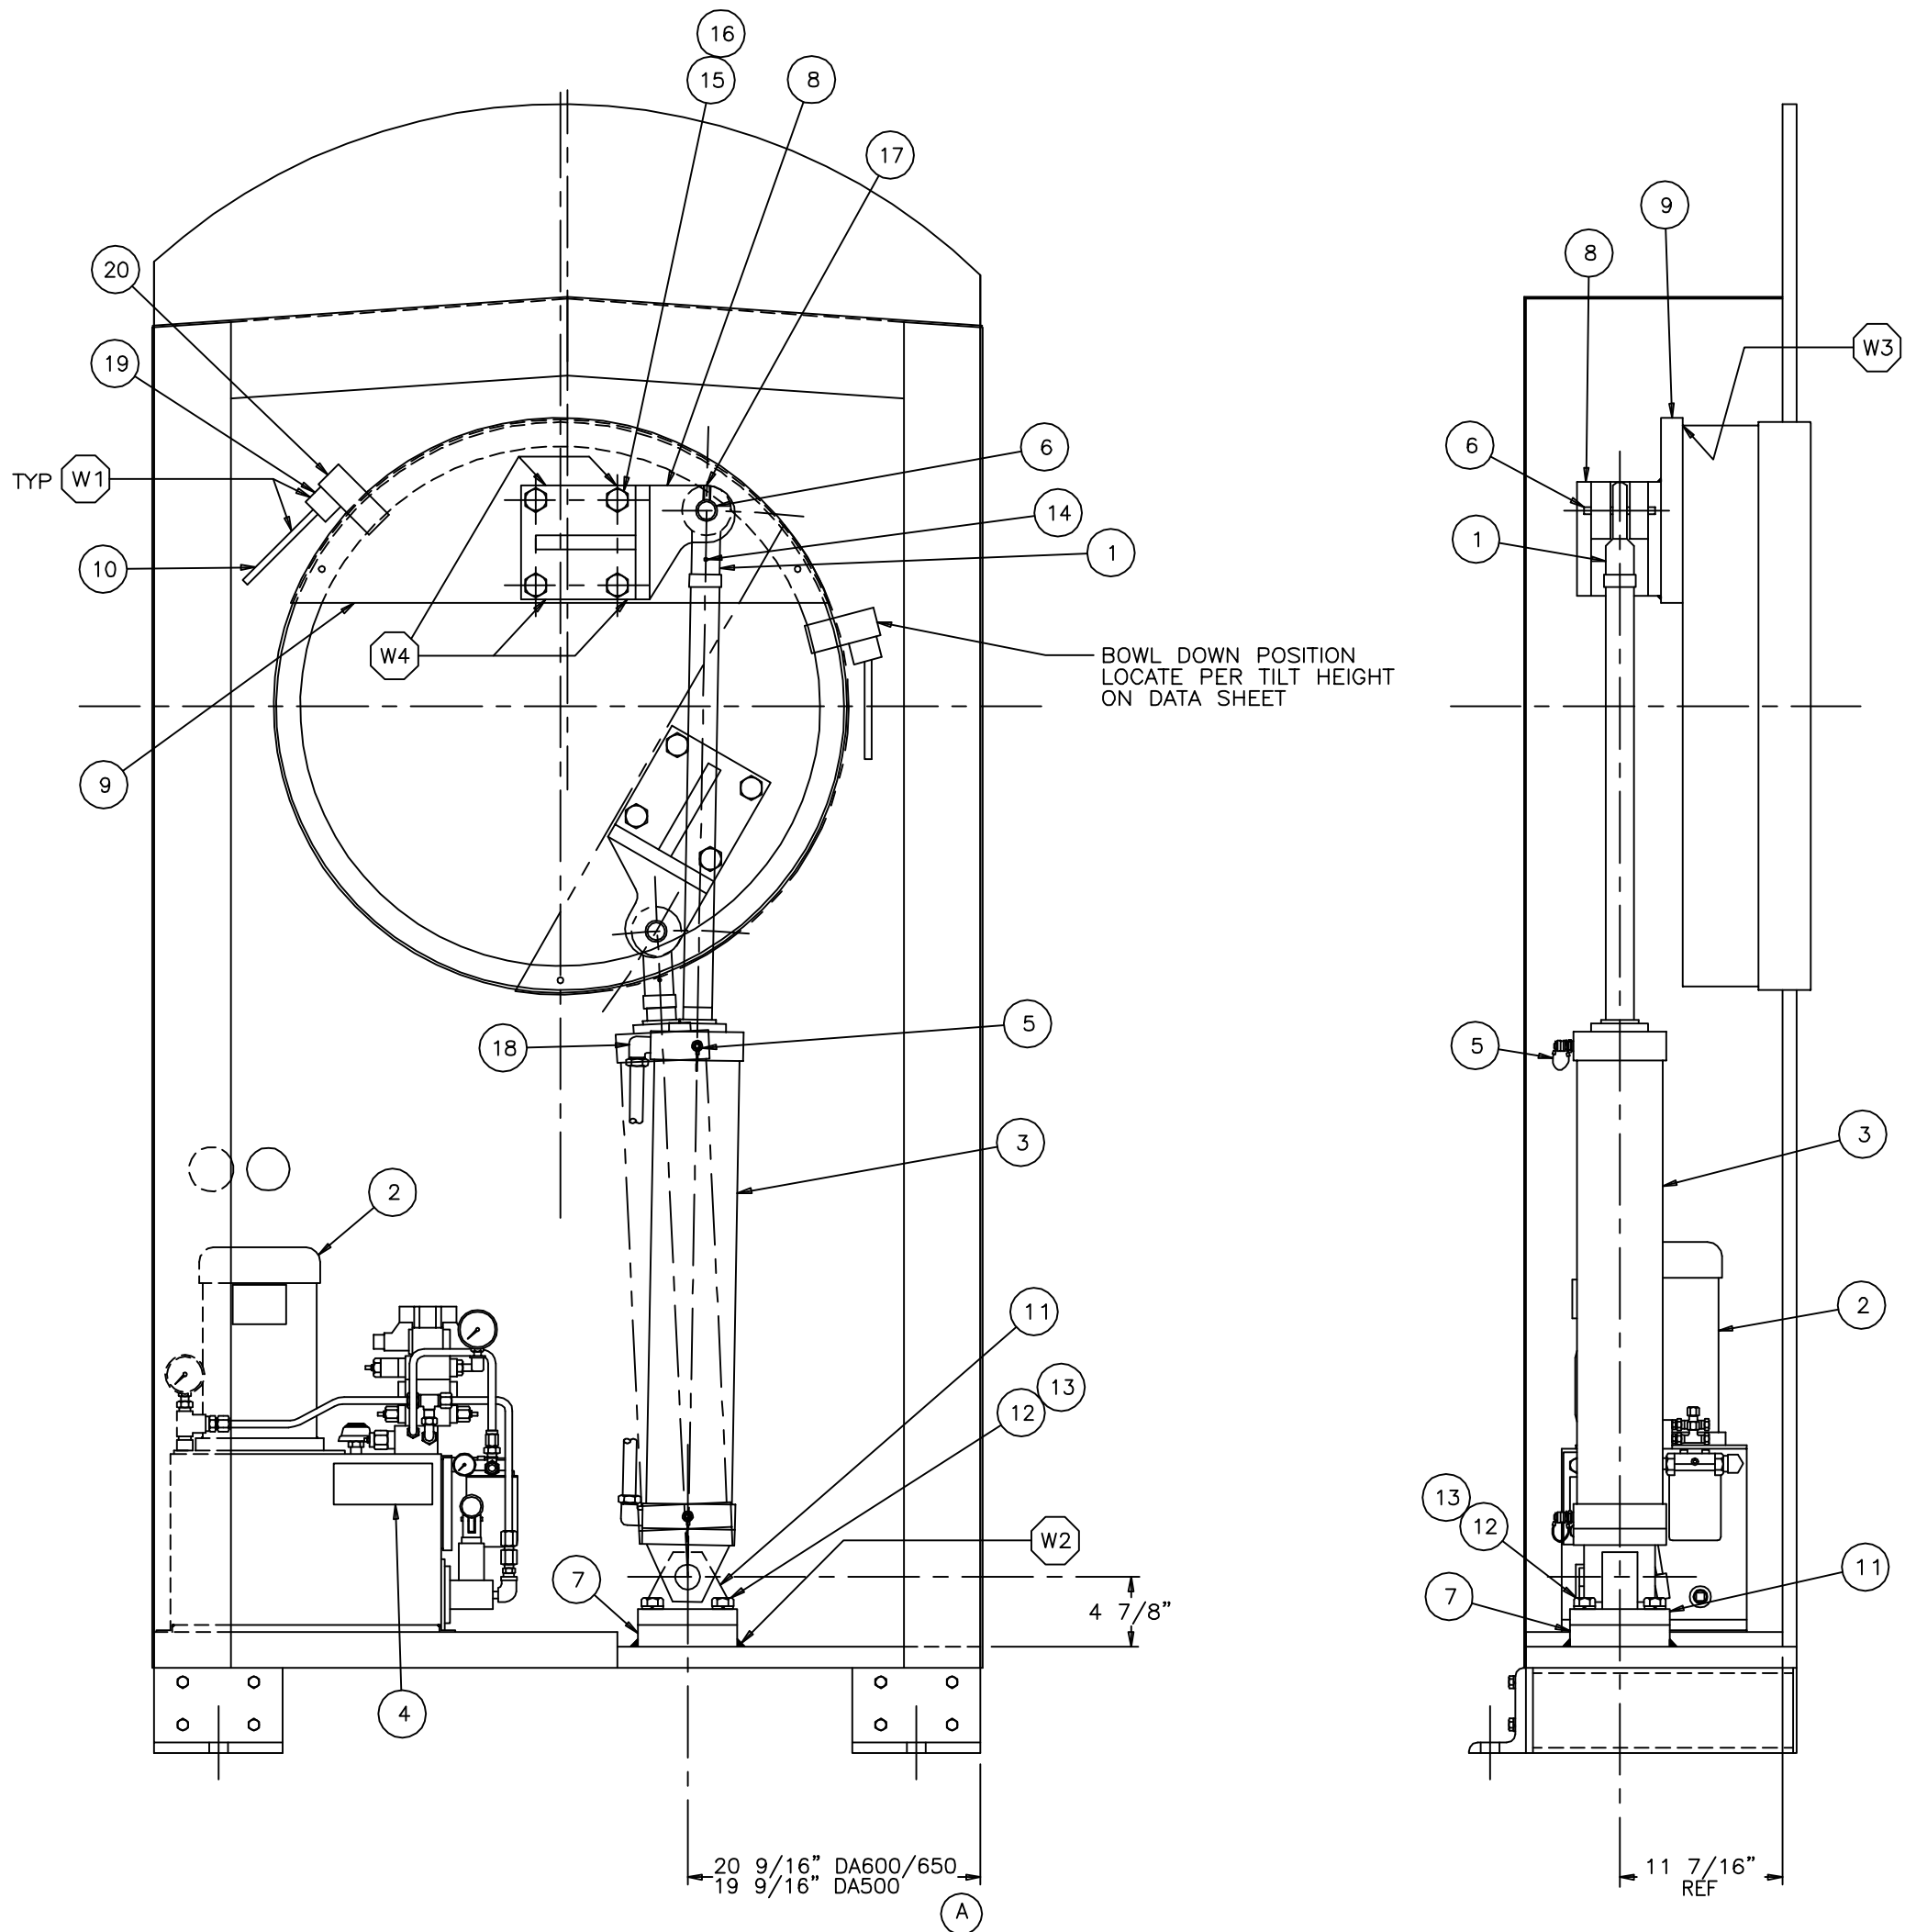

20	1	1057X5	BOWL STOP BAR - 1" X 2" HR FLAT X 5"
19	1	2063X912	BOWL STOP - 1 1/2" X 2" HR FLAT X 9 1/2"
18	2	6801-08-12-N	90° ELBOW - 1/2" 37° JIC X #12 SAE
17	1	90121312E	SOCKET HD SET SCREW - G8 1/2"-13UNC X 1/2" CUP POINT
16	4	9018212A	HEX HD CAP SCREW - M/S 1"-8UNC X 2 1/2"
15	4	901L	LOCKWASHER - M/S 1"
14	1	90316134RP	ROLL PIN - G5 3/16" DIA X 1 3/4" LG
13	4	907893A	HEX HD CAP SCREW - M/S 7/8"-9UNC X 3"
12	4	9078L	LOCKWASHER - M/S 7/8"
11	1	C-8910X	EYE BRACKET - FAUVER
10	2	DA200-10-A7	GUSSET
9	1	DA600-10-B2	TILT LEVER MOUNTING PAD
8	1	DA600-10-B3	TILT LEVER BRACKET ASSEMBLY
7	1	DA600-10-B32	CYLINDER MOUNTING PAD
6	1	DA600-10-B7	ROD END PIN
5	2	FTP04S	TEST POINT PLUG - 7/16"-20 SAE MALE THREAD
4	1	GNA-103	OIL FITTING LABEL
3	1	GNA-1180	HYDRAULIC CYLINDER - 5" BORE, 2" ROD, 29 1/2" STROKE
2	1	GND-699-J	HYDRAULIC SYSTEM - FAUVER - 5HP, 7.8 GPM, 208-230/460
1	1	KW-24Z-1Z	AURORA LG BORE SPHER. ROD END - 1.5" BORE, 1.5-12 THREAD
ITEM	QTY	PART NUMBER	DESCRIPTION

 PEERLESS MACHINERY CORPORATION SIDNEY, OHIO		
TOLERANCES (UNLESS OTHERWISE SPECIFIED) DECIMAL .XX = ±0.1 ANGLES ±1° FRACTIONAL ±1/32 .XXX = ±0.05 BREAK ALL EDGES		
MATERIAL	DRAWN BY J. MARTIN APPROVED BY DT	
SCALE	TITLE	
1:8	HYDRAULIC TILT ASSEMBLY	
DATE	DRAWING NUMBER	FILE NUMBER
3/11/97	DA600-10-D31	D37-87