

## Model T – Industrial, Revolving Tray Oven

### Standard features

- Direct fired
- Gas burners
- Digital controls
- Aluminized steel (interior walls/roof)
- Stainless steel exterior facade Galvanised steel exterior panelling (sides, back)
- Front access doors for driving system gas and electrical components
- Counter balanced doors made of heavy gauge aluminum
- Double stabilisation system for models : T-6-48, T-8-64, T-10-80
- Full steel or perforated metal shelves

### Options

- Exhaust canopy (motor extractor not included)
- Self generating steam system (Built-in)
- Stainless steel steam injectors to use a separated steam boiler
- Baking stone shelves

### Models:


- T-6-36
- T-6-42
- T-6-48
- T-8-48
- T-8-56
- T-8-64
- T-10-60
- T-10-70
- T-10-80

### Installation

An authorized technician from Picard will take care of the unloading and installation at the customer's site. All electrical, gas, water, and chimney hook-ups, along with the oven burner's start-up, are at the customer's expense and have to be done by the qualified installation technician and according to local codes.



## Model T – Industrial, Revolving Tray Oven

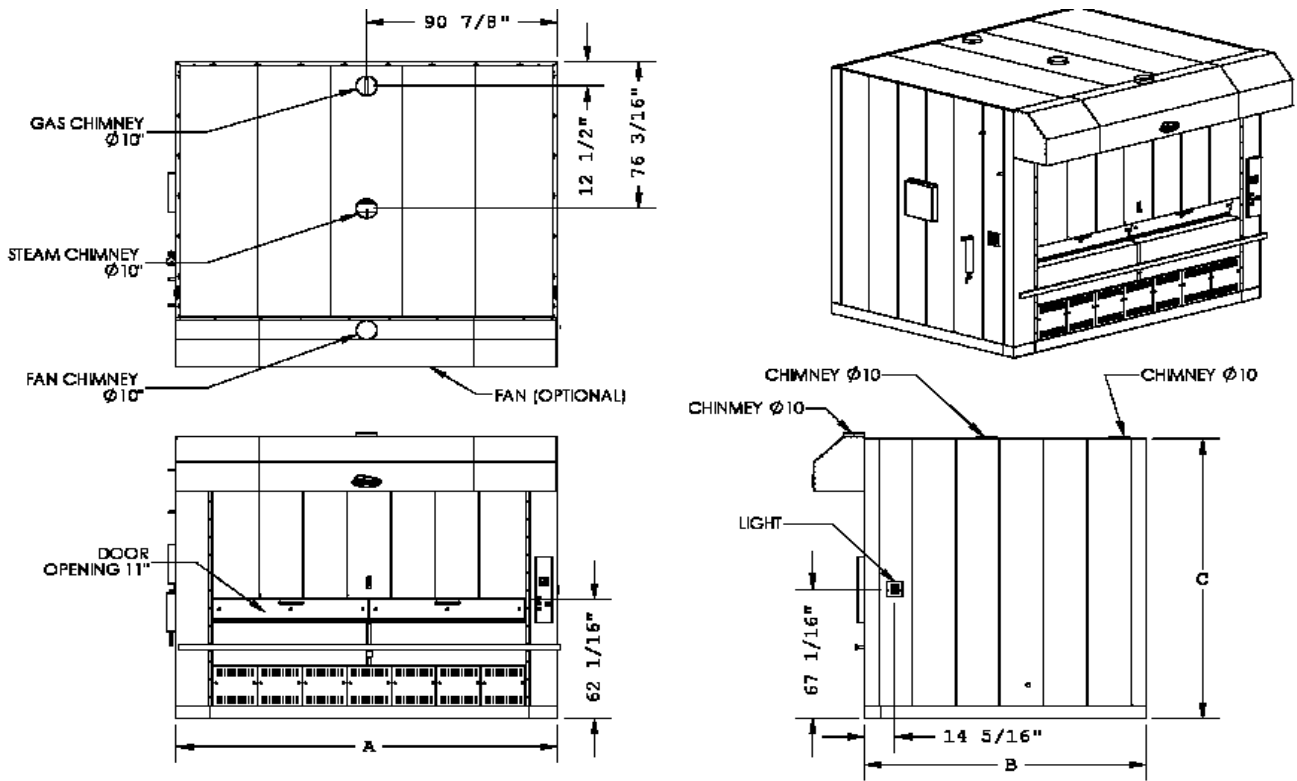

Model	Baking tray capacity 18"x26"	Shelf dimension	Oven width	Oven depth	Oven height Direct fired	Oven height Indirect fired	Oven door net height	Chimney flue diameter	Hood exhaust pipe size	Baking chamber venting diameter	B.T.U.
			A	B	C	C					
T-6-36	36	26½"x 111½"	142½"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	400 000
T-6-42	42	26½"x 129½"	163 7/8"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	420 000
T-6-48	48	26½"x 147½"	181¾"	104"	95 11/16"	109 3/8"	10"	10"	10"	10"	480 000
T-6-48	48	26½"x 111½"	142½"	121¼"	113"	126¾"	10"	10"	10"	10"	2 x 240 000
T-8-56	56	26½"x 129½"	163 7/8"	121¼"	113"	126¾"	10"	10"	10"	10"	560 000
T-8-64	64	26½"x 147½"	181¾"	121¼"	113"	126¾"	10"	10"	10"	10"	2 x 320 000
T-10-60	60	26½"x 111½"	142½"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	600 000
T-10-70	70	26½"x 129½"	163 7/8"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	700 000
T-10-80	80	26½"x 147½"	181¾"	134 3/16"	131 5/16"	145¼"	10"	10"	10"	10"	2 x 400 000