

Display Tortilla Cooking Centers

X-Press Manufacturing offers display tortilla cooking equipment to match every concept and budget. Properly staged, our equipment will provide entertainment value for your customers while at the same time driving your fresh food message home. All products are top of the line and set the standard for ease of use and reliability. Our commitment to your complete satisfaction extends beyond the initial purchase of equipment.

We also focus a lot of attention and effort on all aspects of service after the sale.


Model 88 Display Tortilla Cooking Center

The Model 88 is an automated tortilla press and cooker. It is truly the "workhorse" of the display tortilla cooking world. Take a look at some of the benefits of the Model 88 that make it the choice of most successful food service establishments.

- One person can easily operate
- Minimal floor space requirement, only 4' x 4'
- Reliable design = lower maintenance costs
- Easy to clean open design maximizes display benefit
- Unique, trademarked round design
- Authentic griddle cooking, not oven baked
- No "flour dusting" required for proper operation

Standard Features

- Up to 75 dozen 6" to 8" flour tortillas per hour
- Automatic dough ball feeder
- Stainless steel exterior
- Heavy gauge construction
- Standing pilots for instant ignition
- CSA & NSF certified press
- 120V, 15 amp standard electrical service
- Vent pipe exhaust hood
- One year limited warranty, parts and labor

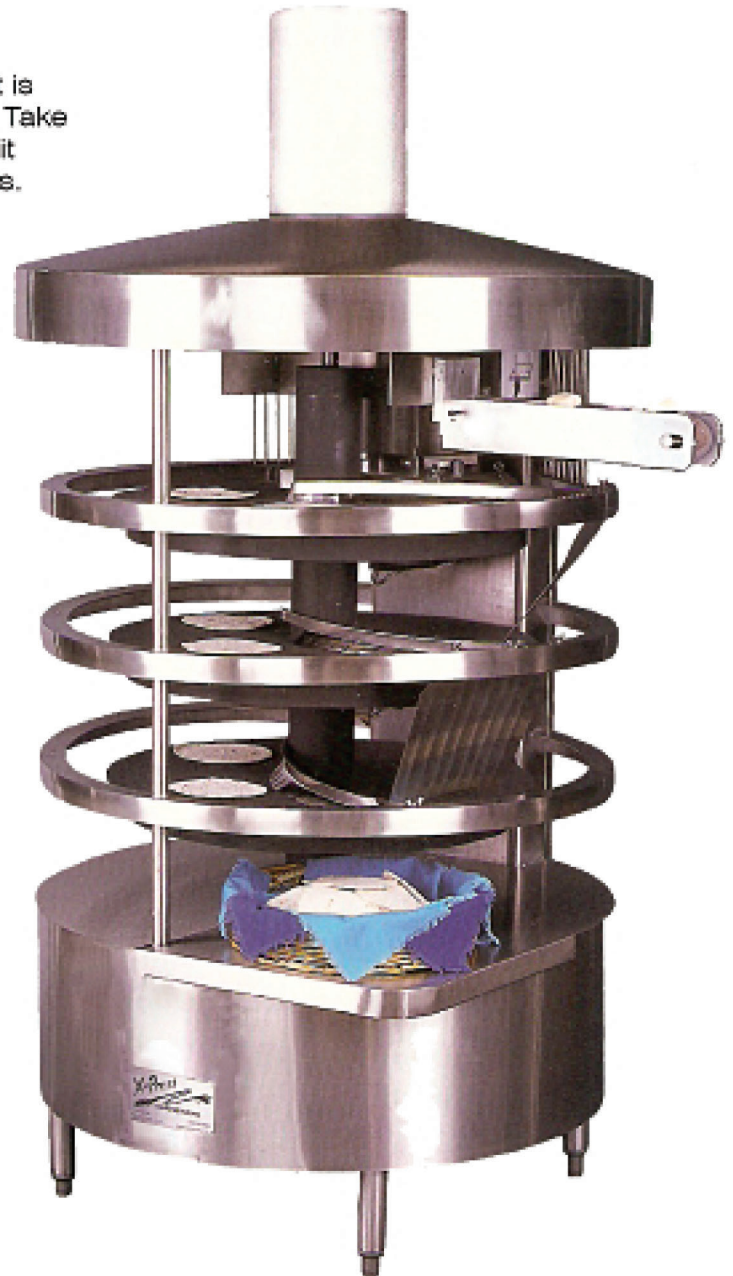

X-PRESS MANUFACTURING

271 FM 306

New Braunfels, TX 78130

Phone: (830) 629-2651 Fax: (830) 620-4727

E-Mail: sales@x-pressmfg.com

Visit our website at: www.x-pressmfg.com



MODEL 88

Display Tortilla Cooking Center

Technical Specifications


PATENT NUMBERS:

4,508,025

4,569,851

4,683,813

Vent Pipe Exhaust Hood

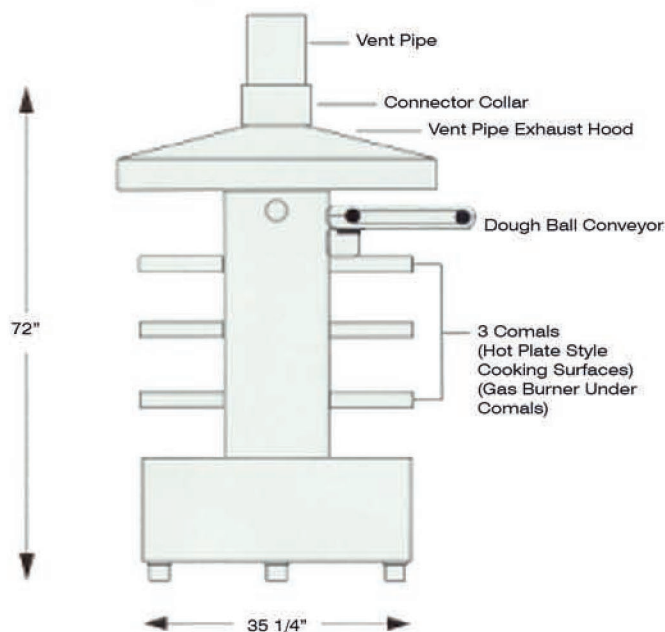

ELECTRICAL

- 120 V, 15 amp, 60 Hz
- Connect directly inside breaker box located in lower center of machine

GAS

- 3 burner, 60,000 total BTU
- 3/4" NPT located underneath machine

MINIMUM CLEARANCES (Griddle)

- Wall: 15" Combustible, 7" Noncombustible
- Floor: 7" Combustible and Noncombustible
- Installation access: 36"W x 63"H

VENTING

- Hot plate classification, powered vent, fan required
- Vent in accordance with local codes, 800 CFM recommended
- Vent pipe exhaust hood and connector collar adapts to 8" vent pipe 69" from floor
- Open top exhaust hood for other ceiling mounted vent systems

SHIPPING

- Weight: 775 lb.
- Class: 110

CERTIFICATION

- CSA Class 2712-86 (ANSI Z83. 11-2013)
- NSF Standard 4

X-PRESS MANUFACTURING

271 FM 306

NEW BRAUNFELS, TEXAS 78130

PH: (830) 629-2651 FAX: (830) 620-4727

E-MAIL: sales@x-pressmfg.com

Visit our website at: www.x-pressmfg.com